HEPA FILTERS

EFFICIENCY
1. 99.97%
2. 99.99%
3. 99.999%

CAPACITY/PACK STYLE
1. SEPARATOR
2. MINI PLEAT

FRAME MATERIAL
1. 16 GA 409 STAINLESS
2. 16 GA 304 STAINLESS
3. 3/4" FIRE RETARDENT PLYWOOD
4. FABRICATED ALUMINUM
5. 3/4" FIRE RETARDENT PARTICLE BOARD
6. 16 GA. GALVANNEAL
7. 3/4" NON FIRE RETARDENT PARTICLE BOARD

FRAME STYLE
1. BOX
2. DOUBLE TURNED FLANGE
3. SINGLE STRAIGHT FLANGE
4. SINGLE HEADER
5. DOUBLE HEADER
6. GROOVE SEAL
7. REVERSE GROOVE SEAL

FLOW RATE
1. STANDARD CAPACITY
2. LOW RESISTANCE
3. HIGH CAPACITY

GASKET MATERIAL
1. NEOPRENE
2. GEL
3. HIGH TEMP SILICONE

GASKET LOCATION
1. UPSTREAM
2. DOWNSTREAM
3. BOTH SIDES

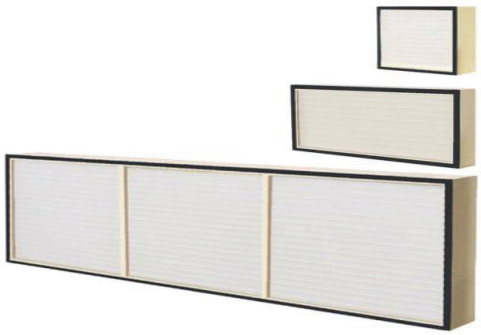

FILTER SIZE
1. HEIGHT (DIRECTION IN WHICH PLEATS RUN, X WIDTH X DEPTH)
2. EXACT
3. NOMINAL

FOR MORE INFORMATION PLEASE CONTACT:
FILTRATION MANUFACTURING, INC.
47 J. FARIS DRIVE
ANDALUSIA, AL 36421
PHONE: 800-239-9495 * FAX: 800-239-9798