
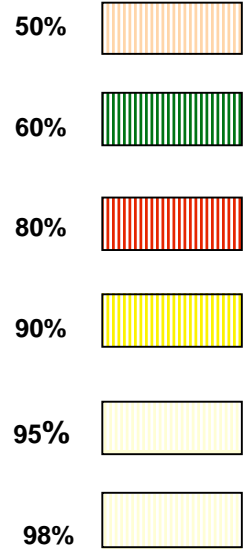


4 inch Mini-Pleat

Technical Construction Information

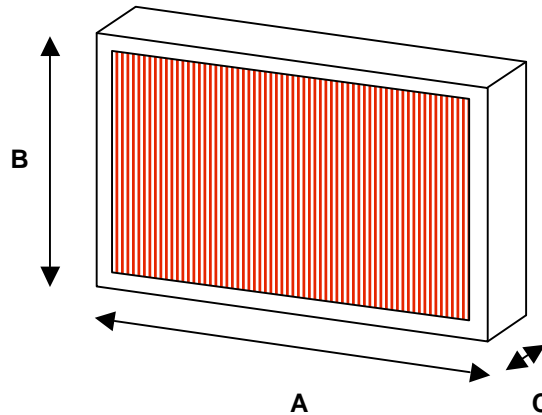

Synthetic Minipleat Panel Filter

Size #	Width	Height	Depth	Media Area sq. ft. approx.
	A	B	C	
24x24x4	23 3/8	23 3/8	3 3/4	110.00
24x20x4	23 3/8	19 3/8	3 3/4	91.20
24x12x4	23 3/8	11 3/8	3 3/4	53.50
16x20x4	15 3/8	19 3/8	3 3/4	47.60
16x25x4	15 3/8	24 3/8	3 3/4	60.00
20x20x4	19 3/8	19 3/8	3 3/4	75.60
20x25x4	19 3/8	24 3/8	3 3/4	95.10

Tolerances in size +/- 1/16 +/- 1/16 +/- 1/16

Initial resistance @ 500 fpm

Dimensions are in inches

- Media, Spacer beads and Frame material are 100% polypropylene
- Media is single web, non-shedding, gradient density
- Pleat Spacer thermally bonded to both sides of media, color coded for efficiency
- Frame durable hard plastic
- All filter components are anti-microbial by nature
- Water proof construction
- ASHRAE 52.2-1999 tested and certified
- UL900 Class 1 U.S. tested and certified



Filtration Manufacturing, Inc.
 47 J. Faris Drive
 Andalusia, AL 36421
 Phone: (800) 239-8413
 Fax: (800) 239-9798